

# MetsäBoard Pro FSB

## PRODUCT SHEET

### PRODUCT DESCRIPTION

Food service board, top coated, hard sized, OBA free


### MAIN END USES

Foods, Beverages, Healthcare, Frozen food, Paper plates, Folded trays, Fast food applications, General packaging

### FEATURES

Printing methods	Offset, Flexo, Digital printing
Food contact	EU Regulation (EC) No 1935/2004, GB9685, GB4806.8, USFDA21CFR§176.170*, USFDA21CFR§176.180*
Mill	Metsä Board Husum

### STRUCTURE

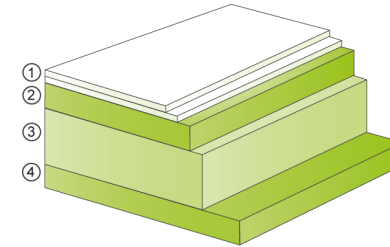

- 1) Double blade coating
- 2) Bleached chemical pulp
- 3) Bleached chemi-thermo-mechanical pulp (BCTMP)
- 4) Bleached chemical pulp

## TECHNICAL INFORMATION

PROPERTY, UNIT	METHOD	STANDARD	TOLERANCE	VALUES											
Grammage g/m <sup>2</sup>		ISO 536	± 4%	195	210	220	230	245	255	265	280	290	315	345	
Bending stiffness CD mNm	Taber 15°	ISO 2493	± 15%	3.8	4.6	5.4	6.6	8.1	9.0	10.0	11.6	13.0	16.0	19.0	
Bending stiffness MD mNm	Taber 15°	ISO 2493	± 15%	7.8	9.7	11.0	13.5	16.5	18.4	20.2	23.3	26.3	32.5	38.0	
Thickness µm		ISO 534	± 4%	300	325	350	375	405	425	445	475	495	545	600	
Moisture content %		ISO 287	± 1.0	7.0	7.0	7.0	7.2	7.5	7.7	7.7	7.8	8.1	8.3	8.5	
Smoothness top	PPS10	ISO 8791-4		<1.4	<1.4	<1.4	<1.4	<1.4	<1.4	<1.4	<1.4	<1.4	<1.4	<1.4	
Brightness top %	Illumination C/2°	ISO 2470-1	± 1	84	84	84	84	84	84	84	84	84	84	84	
Water absorption top g/m <sup>2</sup>	Cobb 3 min	ISO 535		≤40	≤40	≤40	≤40	≤40	≤40	≤40	≤40	≤40	≤40	≤40	
Water absorption middle, back g/m <sup>2</sup>	Cobb 3 min	ISO 535		≤50	≤50	≤50	≤50	≤50	≤50	≤50	≤50	≤50	≤50	≤50	
Off-flavour (Robinson test)	12 months in original package	EN 1230-2		<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	

Tolerances, when specified, are based on 95% confidence limits on single mill measurements of random samples measured in manufacturing conditions.

Metsä Board Paperboard mills have PEFC chain of custody, FSC chain of custody and FSC controlled wood certificates.

\*Please contact Metsä Board for details of country-specific restrictions and/or limitations.

Issued 04.05.2017.